



product
information

6G89-WHE19606
HIGH SOLIDS LOW VOC WHITE
REGLAZING POLYURETHANE

Cardinal's 6G89-WHE19606 white catalyzed with 6GHP is a high-solids aliphatic two-component polyurethane coating. The 6789-WHE19606 was formulated to meet strict air quality regulations, while maintaining the application and performance benefits of a conventional polyurethane coating.

TYPICAL USES:

- Top coat for decorative and protective uses

BENEFITS:

- Low VOC – 2.1 lbs/gal
- Very high gloss
- Excellent chemical and solvent resistance

CURED FILM PROPERTIES:

Testing conducted on 6G89-WHE19606 gloss white catalyzed with 6GHP at 1.5 mils DFT (Dry Film Thickness) over 20 gauge Bonderite 1000® test panels, cured 30 minutes at 180°F and air dried 14 days.

TEST	METHOD	PARAMETERS	RESULT
Adhesion	ASTM D3359	Cross-hatch tape	0% failure
Impact:	ASTM D2794	Direct Reverse	130 in. lbs. 60 in. lbs
Flexibility:	ASTM D1737	1/8" mandrel	No cracking
Hardness	ASTM D3363	Pencil	H - 2H
Abrasion	ASTM D4060	CS-17 wheels, 1 kg, 1000 cycles	Less than 100 mg loss
Humidity	ASTM D2247	168 hrs	No effect
Salt Spray	ASTM B117	1000 hrs 95°, 5% salt solution	Less than 3/16" creep - along scribe, otherwise, no effect
UV Light	ASTM G53	1000 hrs	90.3% gloss retention
Solvent Resistance	ASTM D4752	MEK 100 rubs IPA 200 rubs	No effect No effect
Chemical & Stain Resistance	ASTM D1308 30 min. spot	A – 0.1N HCl, 30 wt. motor oil, ammonia, butyl carbitol, butyl cellosolve, Cascade®, Clorox®, Coca Cola®, coffee, diethyl ether, Drano®, Fantastic®, fiber pen ink, floor stripper, gasoline, IPA, Ivory® Liquid, lanolin lotion, lemon juice, Snap®, Spic & Span®, tap water, vegetable oil, water base ink, WD-40®. B – ball point pen ink, carbon disulfide, correction fluid, Freon TF®, MEK, nail polish. C – chloroform. D – solvent base ink.	A: No effect B: Slight dulling C: Moderate effect D: Discolored & softened

**THIS COATING MUST BE USED
ONLY IN A WELL VENTILATED
AREA!
KEEP THIS COATING AWAY
FROM ANY AND ALL SOURCES
OF IGNITION!**

TYPE: Aliphatic acrylic/polyester polyurethane.

COMPONENTS: Two.

COLORS: White

GLOSS: High

COVERAGE: At 1.0 mil DFT, 65% transfer efficiency(TE)

Mixed paint, 1.0 lbs/gal: 530 ft²/gal.

Calculation: 1604 ft²/gal x % volume solids x TE ÷ DFT

VOC MIXED: 250 grams/liter = 2.1 lbs/gal minimum.

250 grams/liter= 2.1 lbs/gal minimum.

See mix ratio table below.

VOLUME SOLIDS:

6G89-WHE19606 36%

6GHP 87%

Mixed to 2.0 lbs/gal 34%

FLASH POINT: -4°F TCC

SHELF LIFE: 1 year from date of manufacture in factory sealed container.

APPLICATION: After preparing the surface, thoroughly mix component 1 before adding catalyst. Mix only the amount of material needed. The base to catalyst proportion must be measured accurately, by volume only, to obtain optimum film properties. Do not use reducers that contain water or alcohol; these react with the catalyst and can cause a variety of problems. Be aware of spray-able pot life. Brushing, rolling and dipping are not recommended.

MIX RATIOS: Two components must be mixed properly to obtain coating performance. Thinning depends on applicator's regulatory VOC limits.

Parts are by volume	COLORS GLOSS
6G89-WHE19606	8
6GHP catalyst	1
HP-439	2

VISCOSITY: Will vary depending on a given VOC. At 1.0 lbs/gal, gloss colors will be in the 20"-30" #2 Zahn range.

SPRAY-able Pot Life: 2-3 hrs. at 2.0 lbs. VOC/gal

RECOMMENDED DFT: 1.5 – 2.5 mils

CURE: Air Dry

Tack free 2 hrs.

Dry to handle 24 hrs.

Dry hard 72 hrs.

(Continued on page 2)

SURFACE PREPARATION AND PRIMING: The most important steps in a successful coating process are cleaning, pretreatment and priming. The following is a brief outline of some basics for unpainted substrates. It is not intended to be all-inclusive. For more information on your particular application contact Cardinal.

Cleaning the substrate: All surfaces to be coated, must be free of dirt, grease, oil, oxidation, mill scale, and all other contaminants. The surface must be thoroughly dry before painting. Air quality regulations have limited the allowable emissions from cleaning operations.

Plastic — All mold release should be completely removed. 6400 series polyurethane is compatible with a variety of plastics, however, since there are numerous different formulations of plastic, a trial sample should be painted and checked before running production. If 6400 attacks or weakens the plastic, a barrier coat of 3777-1 clear waterborne acrylic enamel may help.

PRIMER SELECTION:

PRODUCT NO.	DESCRIPTION	FUNCTION
6G61-WHE12426	Polyurethane White Primer	Corrosion resistance, some surfacing

RELATED PRODUCTS:

PRODUCT NO.	DESCRIPTION
HP-439	Medium exempt reducer
Quick Dry	Accelerator. Speeds up dry time (and shortens pot life).
6SLA100	Surfactant. Helps eliminate blisters, bubbles, pin holes, solvent-pop.

TROUBLE SHOOTING:

PROBLEM	CAUSE	REMEDY
Blisters, pin holes or solvent pop	Water contamination. Entrapped air. Entrapped solvent	Eliminate water – Check air lines. Use fresh catalyst. Use urethane grade thinners. Increase atomization, decrease film build.
Craters	Contaminated ambient air, e.g., silicone mist, dust.	Locate and eliminate source of contamination.
Fish-eyes	Substrate contamination.	Clean and prepare substrate.
Not drying	Alcohol in reducer. Wrong catalyst ratio.	Use Cardinal's 1600 series or urethane grade reducers only. Double check mix ratio.
Poor adhesion	Improper surface preparation.	See surface preparation section.
Gloss variation	Variation in application, cure schedule, catalyst ratio, humidity.	Consistent gloss depends upon consistent process.

APPLICATION EQUIPMENT: Most air quality regulations require the paint application transfer efficiency to be 65% or better. This generally means using electrostatic or high volume low pressure (HVLP) spray guns. Otherwise, conventional pressure feed, airless or air assisted airless spray equipment can be used. Air supply lines need water and oil traps.

EQUIPMENT CLEAN-UP: Clean up should be done as soon as possible keeping in mind the pot life of the mixed paint. Avoid leaving catalyzed paint in the lines. Air quality regulations have limited the allowable emissions from cleaning operations.

PRODUCT LIMITATIONS:

- Catalyst reacts with water. Air supply should be dry. Containers should be kept tightly closed. Use urethane grade thinners only.
- Alcohols and glycols interfere with curing chemistry and should be avoided. They can be found in some lacquer thinners and certain synthetic reducers.
- Optimum film properties are dependent upon proper mixing of paint and catalyst.

SAFETY: Refer to the product's Material Safety Data Sheet (MSDS) for complete safety information. Contains organic solvents. Use with adequate ventilation. Do not breathe vapors or spray mists. If component TLVs are exceeded, a NIOSH approved air supplied respirator is advised. See MSDS for TLV information.

Contents are **FLAMMABLE**. Keep from heat, sparks or open flame.


Allergic reactions are possible. Avoid use by persons with respiratory problems. Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling.

FIRST AID:


Eye contact: flush immediately with plenty of water for at least 15 min. and get medical attention.

Skin contact: wash thoroughly with soap and water for 5 minutes.

If swallowed, do not induce vomiting and get medical attention immediately.



PRODUCT IDENTIFICATION

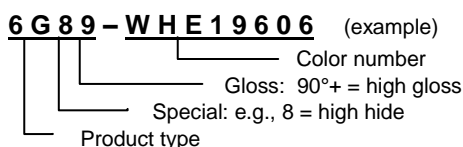

IMPORTANT: Warranty and Disclaimer — The performance characteristics of these products vary according to product application, operating conditions, materials applied to or with and use. Since these factors can affect results, we strongly recommend that you make your own test to determine to your satisfaction whether the product is of acceptable quality, has not been affected by storage or transport and is suitable for your particular purpose under your own operation conditions prior to using any product in full scale production. Seller warrants the products to be free from defects in materials and workmanship. SUCH WARRANTY IS EXCLUSIVE AND IS IN LIEU OF ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OF FITNESS FOR A PARTICULAR PURPOSE. No representative of ours has authority to waive or change this provision, which applies to all sales of these products.